

DROSSEL-RÜCKSCHLAGVENTIL ZULUFT


Messing vernickelt

Typ DRVZU ... MSV



Körper	Messing/CW617N vernickelt
O-Ring	NBR
Dichtungen	Kunststoff
Gewinde	DIN EN ISO 228
Betriebstemperatur	-20°C bis +70°C

Abmessungen

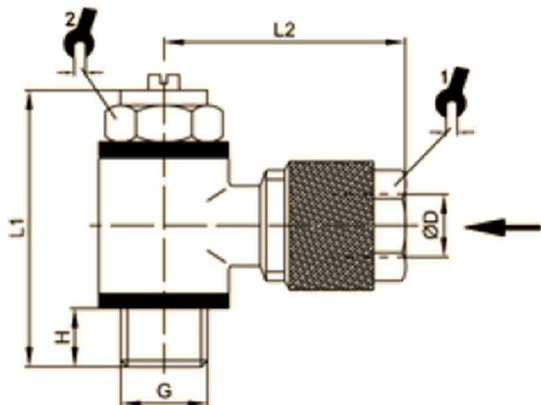

Schlauch	G	H	L1	L2	SW1	SW2	l/min
5/3	M5	4	25	16	8	8	45
5/3	G1/8	5	32	21	8	14	310
6/4	M5	4	25	16	9	8	45
6/4	G1/8	5,5	32	21,5	10	14	310
6/4	G1/4	6	37	24,5	10	17	420
8/6	G1/8	5	32	20,5	12	14	310
8/6	G1/4	6	37	22,5	12	17	420
10/8	G1/4	6	37	26,5	14	17	420
10/8	G3/8	6,5	46	30,5	14	20	500