


Muffen-Absperrschieber

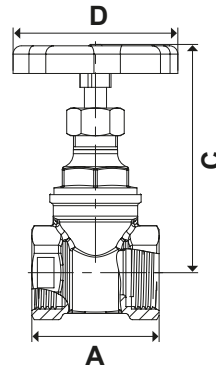

| | |
|-------------------|---|
| Gehäuse: | Messing |
| Handrad: | Stahl, rot lackiert |
| Medientemperatur: | 0°C bis 150°C (ohne Dampf) |
| Anschluss: | DIN EN ISO 228-1 |
| Zolltarifnummer: | 84818069 |
| Einsatzgebiete: | Wasserversorgung, Heizungs- und Klimaanlage |

| Gewinde | DN | bar | A | C | D | Artikel-Nr. |
|----------|-------|-----|-------|-------|-------|-------------|
| G 1/2" | 15,0 | 16 | 42,0 | 72,5 | 50,0 | 200013906 |
| G 3/4" | 20,0 | 16 | 46,0 | 82,5 | 60,0 | 200013907 |
| G 1" | 25,0 | 16 | 50,0 | 96,0 | 60,0 | 200013908 |
| G 1 1/4" | 32,0 | 16 | 55,0 | 104,1 | 70,0 | 200013909 |
| G 1 1/2" | 40,0 | 16 | 60,0 | 116,6 | 70,0 | 200013910 |
| G 2" | 50,0 | 16 | 67,0 | 138,7 | 80,0 | 200013911 |
| G 2 1/2" | 65,0 | 16 | 78,0 | 180,5 | 100,0 | 200013912 |
| G 3" | 80,0 | 16 | 83,0 | 201,5 | 100,0 | 200013913 |
| G 4" | 100,0 | 16 | 100,0 | 237,8 | 120,0 | 200013914 |